

"KAI" automatic hand dryer with Stainless steel cover



- Hand dryer activated by infrared detection sensor.
- Surface mounted.
- Suitable for collectivities.
- Stainless Steel satin finish. Also available in white (NOFER 01251.W) and polish (NOFER 01251.B).
- Strong, vandal proof and build without edges.
- CE certificates.
- MADE IN SPAIN.


TECHNICAL DATA

- AISI 304 Stainless steel cover. 1 mm thick.
- Net voltage: 220 – 240 V / 50 – 60 Hz.
- Total electrical power: 1545 W.
- Induction engine: 2800 r.p.m. and 145 W.
- Isolation: Class II. IPX1 protection rate.
- Air speed: 22 Km/h. Air flow: 2900 l/min. Air temperature: 38 °C at 10 cm.
- Dimensions: 240 high x 265 wide x 165 deep mm.
- Weight: 3 Kg.
- Sound level: 63 dBA.
- Approximate drying time: 28 seconds. Adjustable from 0 to 90 seconds.

SUGGESTED TEXT FOR PRESCRIPTION

"KAI" hot-air hand dryer NOFER or similar, activated by infrared sensor. Electrical power 1545 W, air temperature 38°C. AISI 304 stainless steel cover, satin finish. Dimensions: 240 high x 265 wide x 165 deep mm.

TECHNICAL DRAWING

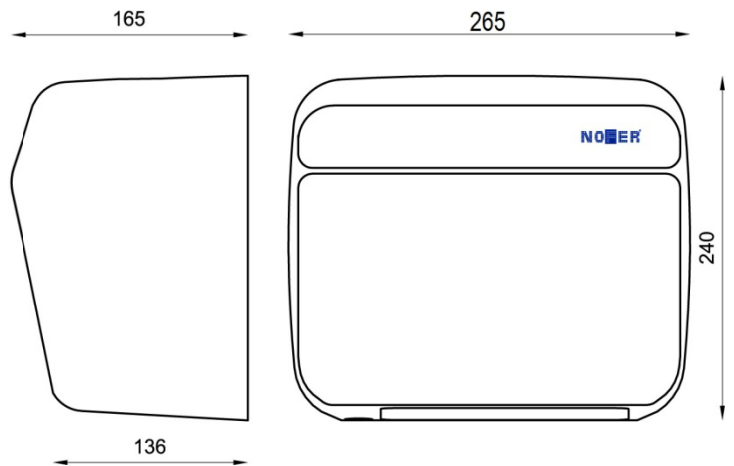

Dimensions in mm



NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 export@nofer.com · www.nofer.com

Related Products

